


4" MOTORS MC4 OIL FILLED



Installation dimension

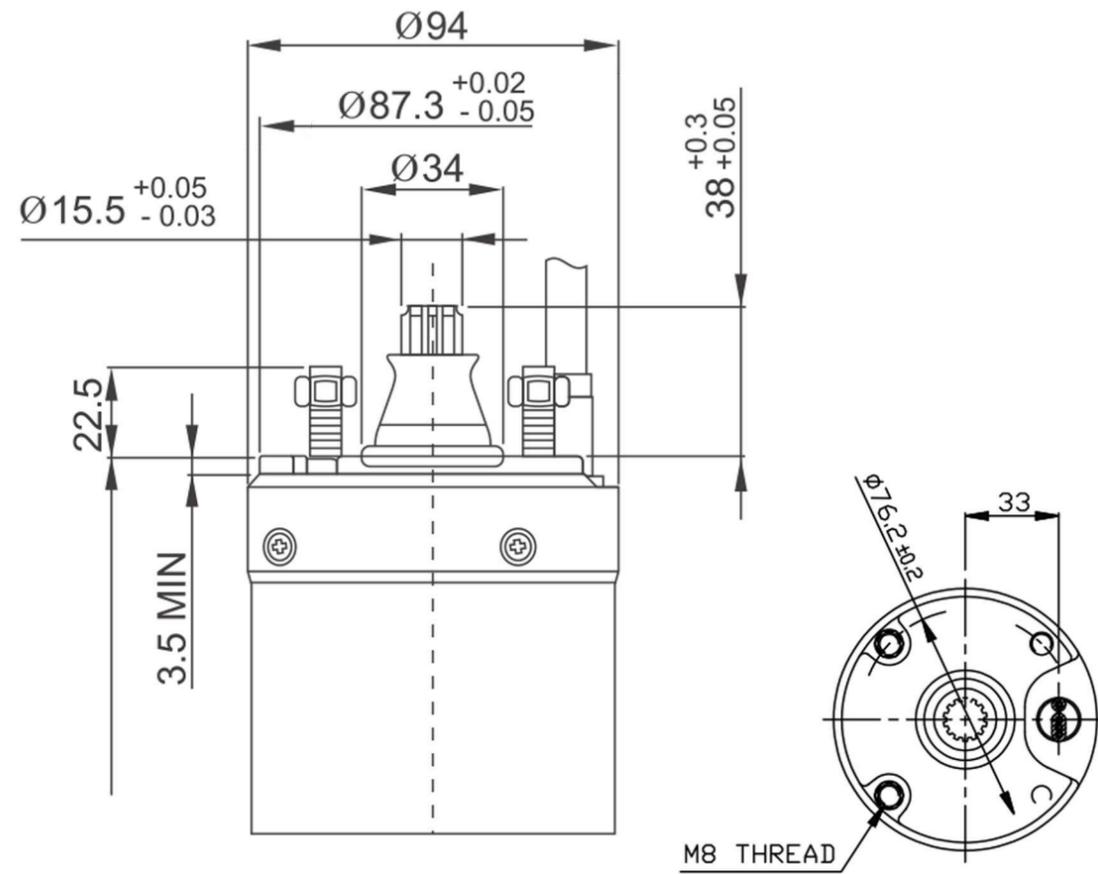

4" Motor

Motor diameter

4" Submersible motor performance data

60Hz

Type	Model	Power	V	Hz	A	COSΦ	Rpm	Weight	Capacitor
4"	1PH	0.37kW	220	60	4.8	0.75	3430	8	18μF/450V
		0.55kW	220	60	5.6	0.75	3440	8.5	20μF/450V
		0.75kW	220	60	7.6	0.84	3440	10.0	25μF/450V
		1.1kW	220	60	10.3	0.89	3450	11.8	35μF/450V
		1.5kW	220	60	13.3	0.92	3450	18	45μF/450V
		2.2kW	220	60	18.0	0.93	3450	20	70μF/450V
		3.7kW	220	60	27.2	0.94	3450	20	120μF/450V

Type	Model	Power	V	Hz	A	COSΦ	Rpm	Weight	Capacitor
4"	3PH	0.37KW	220	50	2.8	0.80	3450	7.5	
			380	50	1.6	0.78	3450		
			460	50	1.5	0.72	3450		
		0.55KW	220	50	3.8	0.80	3450	8	
			380	50	2.2	0.78	3450		
			460	50	1.7	0.72	3450		
		0.75KW	220	50	4.5	0.71	3450	9.0	
			380	50	2.6	0.66	3450		
			460	50	2.1	0.61	3450		
		1.1KW	220	50	5.7	0.73	3450	10	
			380	50	3.3	0.68	3450		
			460	50	2.8	0.63	3450		
		1.5KW	220	50	7.6	0.67	3450	12	
			380	50	4.4	0.62	3450		
			460	50	3.8	0.58	3450		
		2.2KW	220	50	10.3	0.79	3450	14	
			380	50	6.0	0.72	3450		
			460	50	5.0	0.66	3450		
		3KW	220	50	12.4	0.78	3450	17.6	
			380	50	7.3	0.73	3450		
			460	50	6.1	0.68	3450		
		4KW	220	50	19.4	0.78	3450	20.6	
			380	50	11.2	0.72	3450		
			460	50	6.4	0.66	3450		
5.5KW	220	50	25.3	0.77	3450	25.2			
	380	50	14.6	0.70	3450				
	460	50	12.6	0.65	3450				
7.5KW	220	50	34.5	0.79	3450	32			
	380	50	20.0	0.74	3450				
	460	50	17.7	0.69	3450				